


EHP410

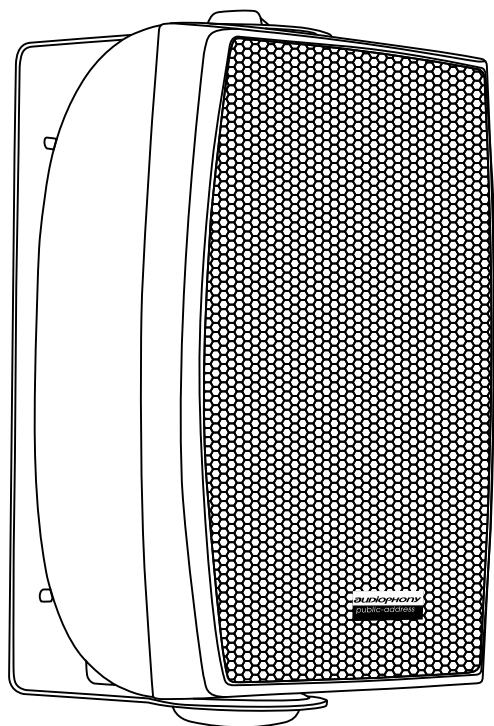



Compact loudspeaker combining sober design and top-of-the-range performance.

The selector at the back of the unit lets you choose the power of diffusion.

To broadcast quality music as close as possible to your needs, with an eye to aesthetics.

	5 or 10 or 20 W in line 100 V
Power ratings	2.5 or 5 or 10 W in-line 70 V
	20 W at 8 Ohms
Power supply	70 or 100 V or 8 ohms
Impedances	2K Ω or 1 k Ω or 0.5 k Ω Ohms or low impedance in 8 Ohms
Components	4" driver and 1" tweeter
Sensitivity (1W/1m)	89 dB, +/-3dB
Frequency response	80 Hz - 18 KHz
Construction	White ABS body, metal grille
Hook	Adjustable mounting bracket
Connections	Two-pin connector
Dimensions	250 x 160 x 145 mm
Weight	1,45 Kg

Wiring

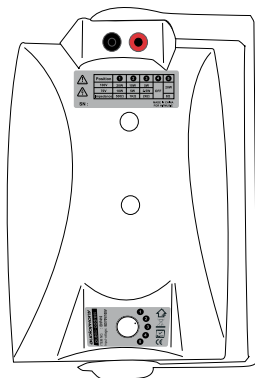

The power of the EHP410 speaker is determined by the position of the selector switch at the rear.

Power can vary from 5 to 10 or 20 W depending on position.

You must ensure that the sum of the powers of all the speakers connected to the amplifier does not exceed the maximum power of the amplifier.

The EHP410 loudspeaker can also be used with low impedance (8 ohms) and therefore connected to a traditional PA amplifier.

- 1 - Always connect the black pin to the "COM" terminal on the amplifier output terminal block.
- 2 - Select the desired power level.
- 3 - Connect the red pin to terminal 70 or 100V on the amplifier output terminal block.




Caution: Dangerous voltage
The speakers should be connected to the amplifier last.
Switch on the amplifier once the installation has been completed and checked



Opposite is an example of wiring for a selected power of 10 watts.

Setting the scene

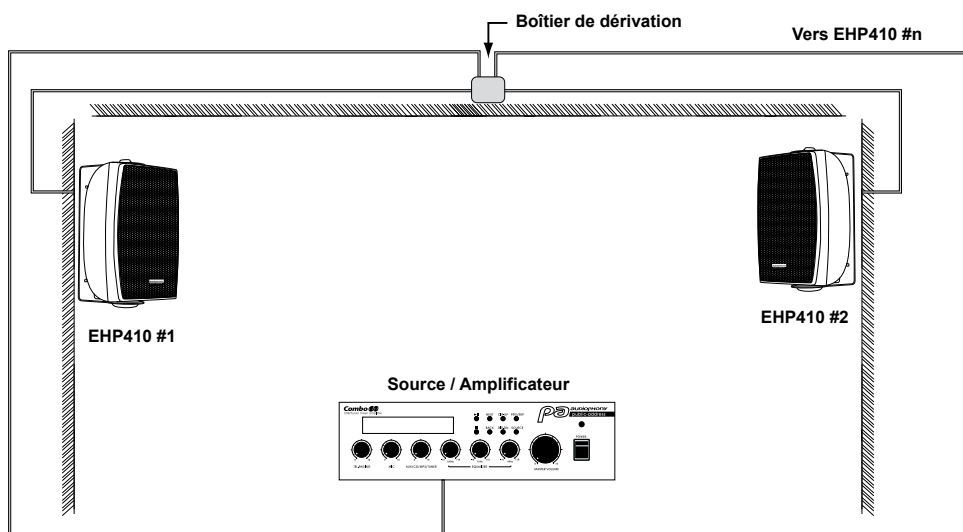

Please note:
The sum of the powers of all the speakers connected must not exceed the maximum power of the amplifier.

Dimensions

