

EHP880

Powerful, versatile speaker



- High-fidelity sound at 80 watts
- Discreet design, available in white or black finish
- An integrated hanging system
- Low impedance or 100V line use

EHP880B black version - CODE 10212

EHP880W white version - CODE 10213

	20 or 40 or 80 Watts in line 100 V
Power ratings	10 or 20 or 40 Watts on 70 V line
	80 Watts into 8 Ohms
Power supply	70 or 100 V or 8 ohms
Impedances	500Ω or 250Ω or 125Ω Ohms or low impedance in 8 Ohms
Components	8" driver and 1" tweeter
Sensitivity (1W/1m)	92 dB, +/-3dB
Frequency response	70 Hz - 18 KHz
Construction	White or black ABS body, metal grille
Hook	Adjustable mounting bracket
Connections	Two-pin connector
Dimensions	455 x 275 x 261 mm
Net weight	6.8 Kg

Wiring

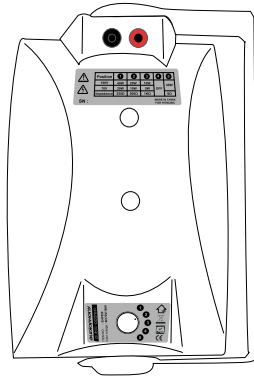

The power and impedance of the EHP880 loudspeaker are determined by the position of the selector switch at the rear. Power can vary from 20 to 40 or 80 W at 100V depending on position.

You must ensure that the sum of the powers of all the speakers connected to the amplifier does not exceed the maximum power of the amplifier.

The EHP880 speaker can also be used with low impedance (8 ohms), so it can be connected to a traditional PA amplifier.

- 1 - Always connect the black pin to the "COM" terminal on the amplifier output terminal block.
- 2 - Select the desired power level.
- 3 - Connect the red pin to terminal 70 or 100V on the amplifier output terminal block.




Caution: Dangerous voltage
The speakers should be connected to the amplifier last.
Switch on the amplifier once the installation has been completed and checked




Opposite is an example of wiring for use on a 100V line.

Setting the scene

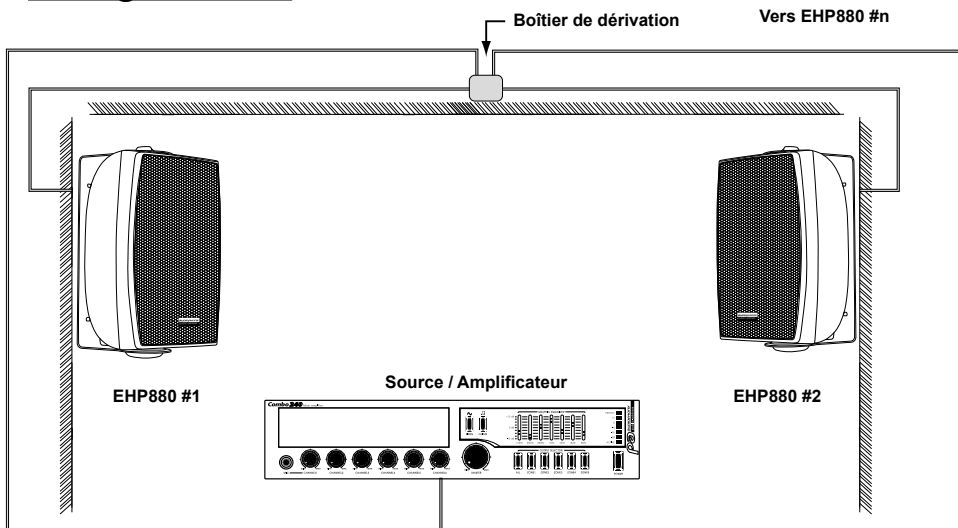


Please note:
The sum of the powers of all the speakers connected must not exceed the maximum power of the amplifier.


Fixing the speaker to the wall in three steps :



Step 1 fixing from lyre to wall



Step 2 fixing from the enclosure to the lyre



Step 3 orientation of the enclosure

Dimensions

