

EXTLINE134W

Column IP56 4 x 4" + 1" - 130 W RMS - 100 V/ 8 ohms

- Robust, weatherproof column made entirely of aluminum
- High-quality components for a highly musical sound
- Operates on 100 V or 8 ohms

SKU: H11616
Categories: Speakers, Column speakers, Wall mount speakers
Tags: IP56

FEATURES

– Operates at 100 V or 8 ohms
– Power: 130 W RMS at 8 ohms 30/60/120 W at 100 V
– Components: 4 4" Kevlar waterproof drivers and 1 1" compression driver
– Dispersion (-6 dB): 100° x 50° (HxV)
– Sensitivity (1 W/1 m): 94 dB
– Frequency response: 120 – 18,000 Hz
– SPL: 115 dB continuous, 121 dB max.
– Connectors: connectors with cable glands
– Aluminum body with aluminum grille and acoustic foam
– ABS body with aluminum grille and acoustic foam
– Silicone plugs and stainless steel screws
– Foam and textile protection against dust and splashes
– Degree of protection: IP56 (protection against dust and rain)
– Dimensions: 704 x 127 x 144 mm
– Net weight: 9 kg

SPL (significant values)
– 1 m : 121 dB
– 5 m : 107 dB
– 7 m : 104 dB

– 10 m : 101 dB
– 15 m : 97 dB
– 20 m : 95 dB
– 30 m : 91 dB

USER MANUALS

Guide de l'utilisateur / User guide

⬇ Guide de l'utilisateur / User guide

Gebruikershandleiding

⬇ Gebruikershandleiding

Benutzerhandbuch

⬇ Benutzerhandbuch

Guía del usuario

⬇ Guía del usuario

DOWNLOADS

Aio presets
EXT speaker presets for Aio matrices (low impedance and 100 V) — ZIP.

⬇ Aio presets

EASE FILE



– Download EASE file

-> EASE file (.gll)

CE CERTIFICATE

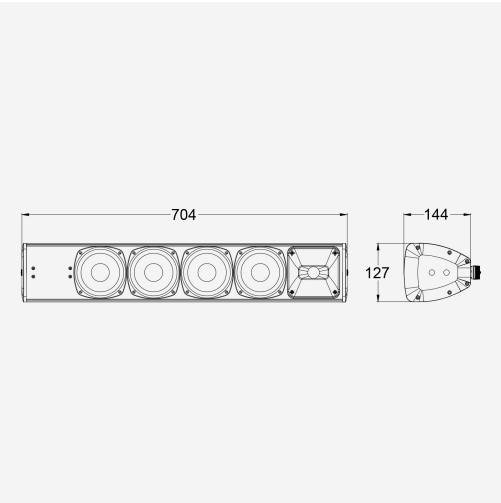
Declaration of conformity

⬇ Français / English






100V
30W
60W
120W
OFF
8Ω 130W
EXTLine134W
Power :130 W RMS
Input voltage : 100V/8Ω
Speaker wiring
1+ / 2-
CAUTION!DANGER
HIGH VOLTAGE
100V


704
144
127